


D E C K O

D O O R S



Classic C

FEATURES

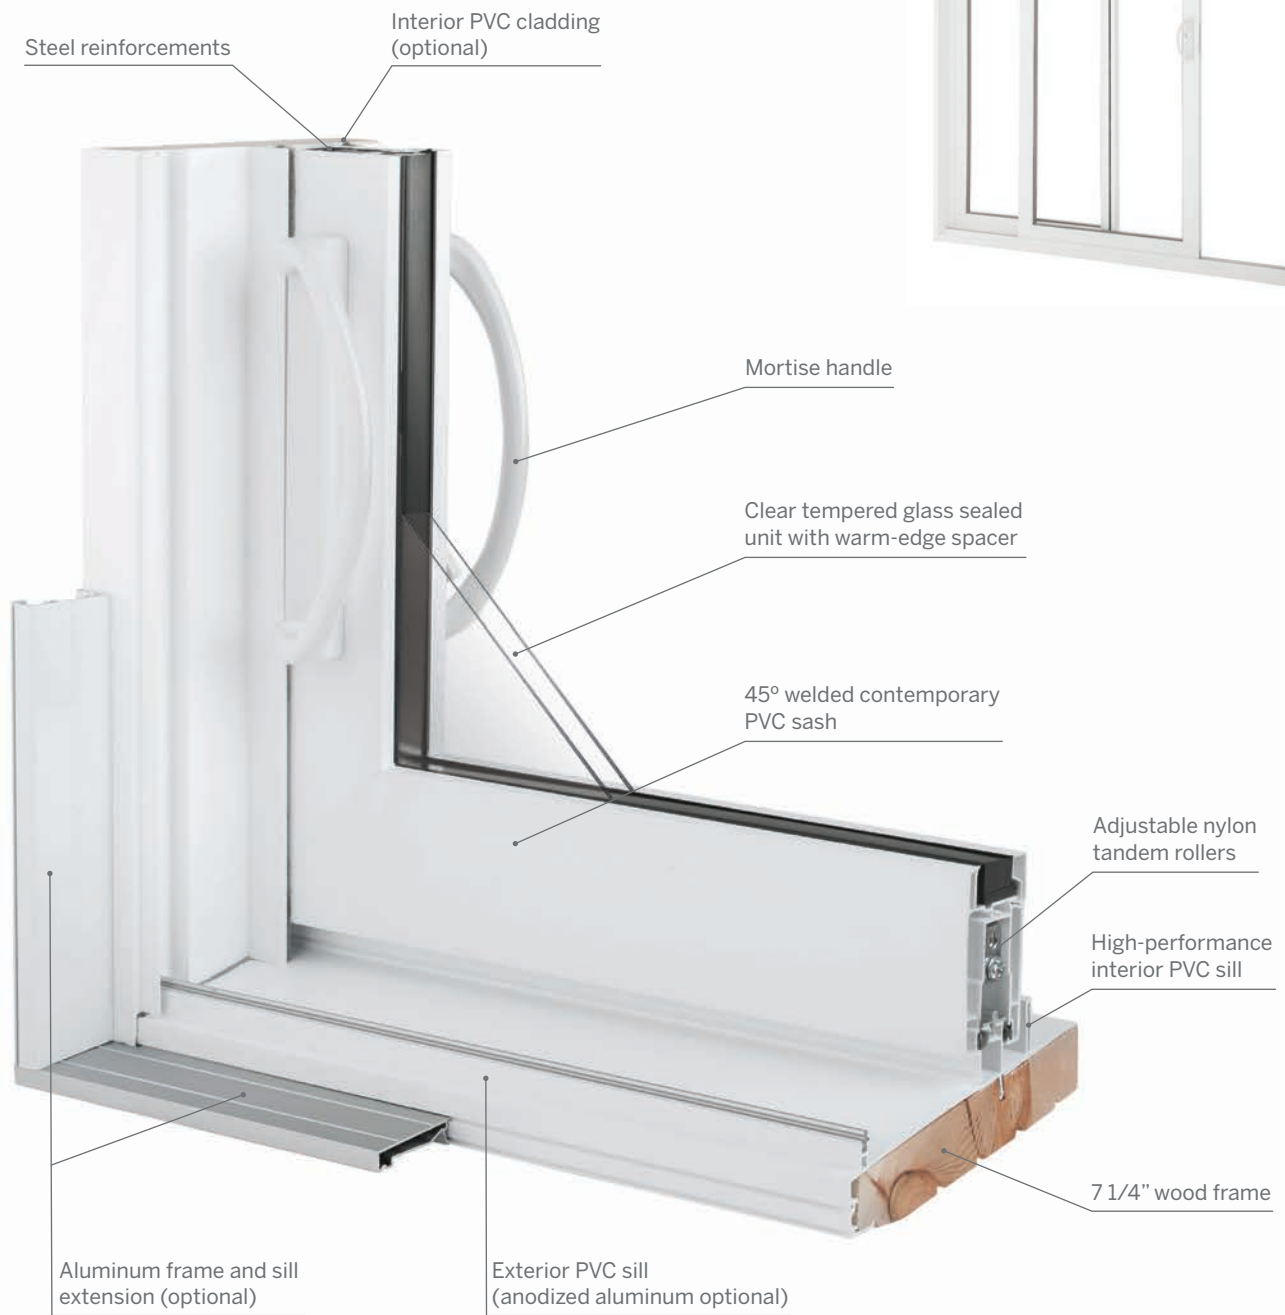

Made-to-measure available

PERFORMANCE



STANDARD	AIR INFILTRATION EXFILTRATION	WATER RESISTANCE	DESIGN PRESSURE	PRIMARY DESIGNATOR
AAMA/WDMA/CSA 101/I.S.2/A440-11	A3	400 Pa (8.35 psf)	2160 Pa (45 psf)	R-PG45-SD 1793 X 2055 mm (~ 71 X 81")

OPTIONS

ENERGY-EFFICIENT DOUBLE-PANE GLASS

CLEAR OR ENERGY-EFFICIENT TRIPLE-PANE GLASS




7/8" sealed unit



1 1/4" sealed unit

PAINT



Doors can be painted to your interior and exterior colour specifications.



BRICK MOULD



1 1/2" wide aluminum brick mould with a 1 1/8" projection.

PVC brick mould with a 1 1/8" projection available in 1 1/2" and 4" widths.

GRILLS

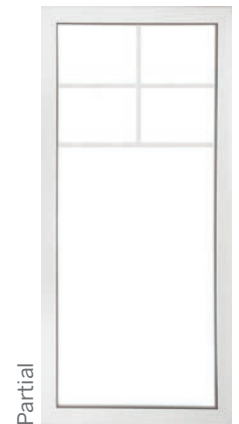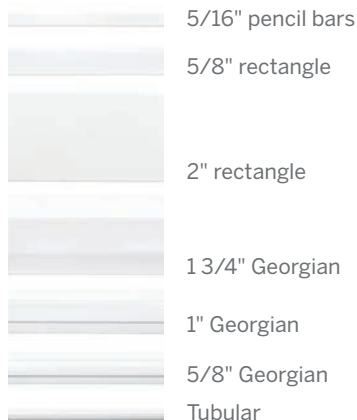

The colours illustrated in this brochure are for illustration only and may differ from actual colours. Some options are not available on all doors.

CONTEMPORARY
EURO HANDLES



White Satin Nickel Black

CONTEMPORARY
9100 HANDLE



Exterior Interior

EURO
HANDLES



Brass Bright Chrome Brushed Chrome Black Nickel Dark Oil-Rubbed Bronze Antique Brass Satin Nickel

KEY LOCK



SECURITY BAR



MULTIPOINT HANDLE



FOOT LOCK



EMBOSSED
TERRACE PANELS



FAKE
MULLIONS



SIDLIGHT
AND TRANSOMS



DIMENSIONS

Classic C

WIDTH	2 LIGHTS				3 LIGHTS			4 LIGHTS		
	5'	6'	7'	8'	9'	10'	12'	9'	12'	
HEIGHT	79 1/2"* 2,019 mm	XO/OX	XO/OX	XO/OX	XO/OX	OXO	OXO	OXO	OXXO	OXXO
						106 3/4" 2,710 mm	124 3/4" 3,167 mm	142 3/4" 3,625 mm		
						XOO/OOX	XOO/OOX	XOO/OOX	106 7/16" 2,703 mm	124 7/16" 3,160 mm
81" 2,057 mm	58 5/8" 1,489 mm	70 5/8" 1,794 mm	82 5/8" 2,099 mm	94 5/8" 2,403 mm	XOX	XOX	XOX	115" 2,920 mm	139" 3,530 mm	
95 1/2"* 2,426 mm					XOX	XOX	XOX			
					103 3/16" 2,621 mm	121 3/16" 3,078 mm	139 3/16" 3,535 mm			

* Energy-efficient glass only.

O: fixed X: open



PORTESDECKO.COM

The manufacturer reserves the right to make changes without notice.

COMPATIBLE PRODUCTS

SONIPLASTICS
CREATING TRANSFORMING INNOVATING SINCE 1970

SONIPLASTICS.COM

© 2017 — All rights reserved. 10/2017 version